Our Product Introduction

38L Heat Exchanger Ultrasonic Cleaner SUS304 600W LCD Skymen JP-120ST

Basic Information

. Place of Origin: China . Brand Name: Skymen CE,FCC,Rohs · Certification: Model Number: JP-120ST • Minimum Order Quantity: 1 unit • Price: Negotiation

 Packaging Details: Wooden case packag size:

1120*1460*1070mm Wooden case

• Delivery Time: In Stock Payment Terms: T/T

1000PCS/month . Supply Ability:



Product Specification

Certification: CE, RoHS, CSA, FCC, EMF

Material: Stainless Steel

Industrial Ultrasonic Cleaner • Machine Type:

28KHz/40KHz • Frequency:

· Capacity: 38L

· Name: Heat Exchanger Ultrasonic Cleaner

• Highlight: Heat Exchanger Ultrasonic Cleaner SUS304,

38L Heat Exchanger Ultrasonic Cleaner, 60600W LCD Benchtop Ultrasonic Cleaner

Skymen JP-120ST 38L Digital Industrial Heat Exchanger Ultrasonic Cleaner With CE FCC RoHS

Ultrasonic Cleaner's Description:

High power transducer cleaning effect significantly, usable macroscopic observation;

After cleaning objects as new again;

Digital LCD control boot time;

The stainless steel and the lid, bladder, more upscale;

Waterproof properties is greatly improved, more safety products last;

With constant temperature system with heating.

Save huge labor cost at your workshop.

Ultrasonic Cleaner's Applications:

Laboratories field;

Medical field (such as surgical instrument);

Electronic parts field (such as PCB Board)

Car/motor/Aircraft parts field (such as engine block, radiator, etc.)

Industrial field;

Ultrasonic Cleaner's Specifications:

ouradonio didanci e oposindatione.					
Model	JP-120ST				
Ultrasonic frequency	40000 Hz				
The tank material	stainless steel SUS304 stamping slot				
Shell material	SUS304				
Capacity	38 L				
Time control	digital control display (1-99 minutes)				
TEMP control	20,80				
Power Control	240 ~ 600W				
Ultrasonic power	600 W, 12 MEDALS head shock				
The tank size	500 x 300 x 250 mm (L x W x H)				
Shape dimension	675 x 475 x 655 mm (L x W x H)				
N.W./ G.W.	35 kg/50 kg				

Similar models with different tank volume:

Model	Tank size	Volume	Ultrasonic	Heating	Transducer
			Power	Power	
	L*W*H (mm)	(L)	(W)	(W)	(pcs)
JP-120ST	500X300X250	38L	600W	1500W	12pcs
JP-180ST	500X350X300	53L	900W	1500W	18pcs
JP-240ST	550X400X350	77L	1200W	3000W	24pcs
JP-300ST	550X450X400	99L	1500W	4500W	30pcs
JP-301ST	800X300X400	96L	1500W	4500W	30pcs
JP-360ST	600X500X450	135L	1800W	4500W	36pcs
JP-480ST	700X500X500	175L	2400W	6000W	48pcs
JP-600ST	800X600X550	246L	3000W	6000W	60pcs
JP-720ST	1000X600X600	360L	3600W	9000W	72pcs
JP-1108ST	1000X900X600	540L	5400W	18000W	108pcs
<u>JP-1144ST</u>	1200X1000X800	960L	7200W	27000W	144pcs

How to use an ultrasonic cleaner?

Cleaning prior to lacquering

Ultrasonic clean 130° F, 2 to 3 minutes, 38 to 40 kHz sweep, 300 Hz sweep rate

Chemistry, Brulin 815GD, 12 ounces per gallon of water

Spray rinse with de-ionized* water to remove gross detergent

Immersion rinse in flowing warm de-ionized* water (30 seconds)

Spray rinse with de-ionized* water (final rinse)

Blow dry with clean compressed air or dry nitrogen

Cleaning to remove calcium buildup (replaces "chem-clean")

Ultrasonic clean <110° F, 2 to 3 minutes, 38 to 40 kHz sweep, 300 Hz sweep rate

Chemistry, Ultra-power 132, 1 to 11/2 ounces per gallon of water

Spray rinse with de-ionized* water to remove gross detergent

Immersion rinse in flowing warm de-ionized* water (30 seconds)

Spray rinse with de-ionized* water (final rinse)

Blow dry with clean compressed air or dry nitrogen

Package by polywooden case:

Ultrasonic Cleaner's Cleaning Effect:

Skymen JP-120ST 38L Digital Industrial Heat Exchanger Ultrasonic Cleaner With CE FCC RoHS








Packing & Delivery

range from mini househo as well as Immersible ul	ment Shenzhen Co. Ltd., that old ultrasonic cleaner, benchto trasonic transducer system.Ou cept customer's idea and wan	op stainless steel small ultras ur company devote to researd	onic cleaner, and industrial ch and development, with si	large tank ultrasonic cleane

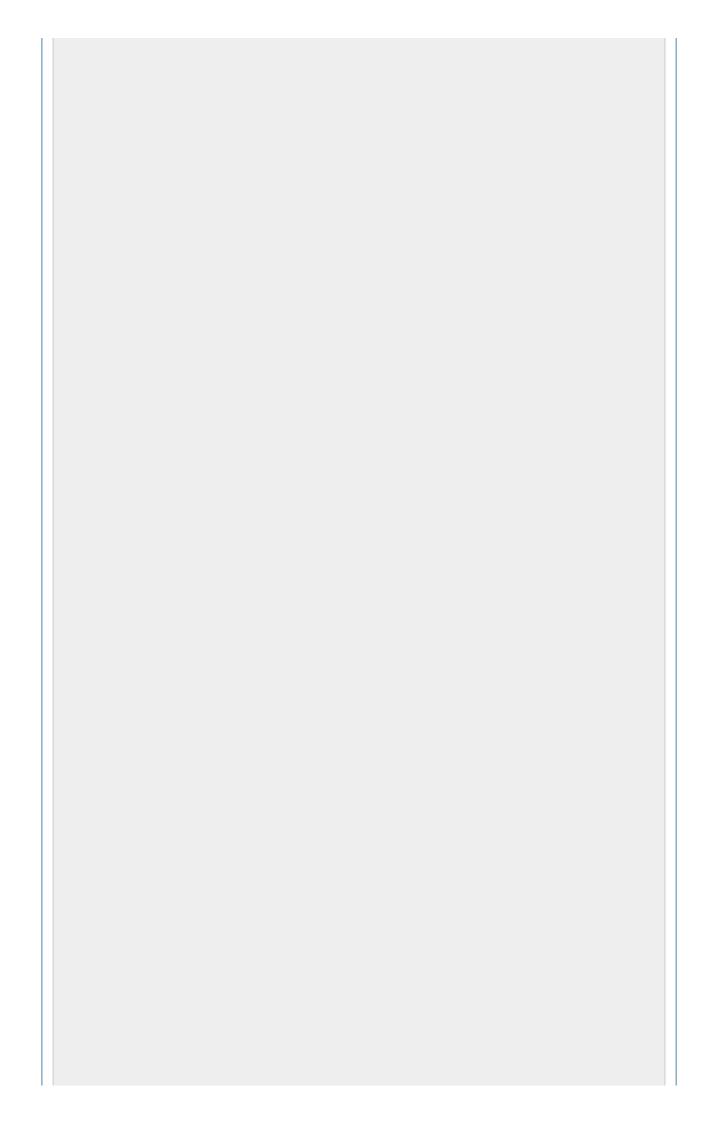





Skymen Technology Corporation Limited



86-755-27094405



info@skymen.cc



skymenultrasonic.com

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen